








ISFET pH Hand-Held Meters

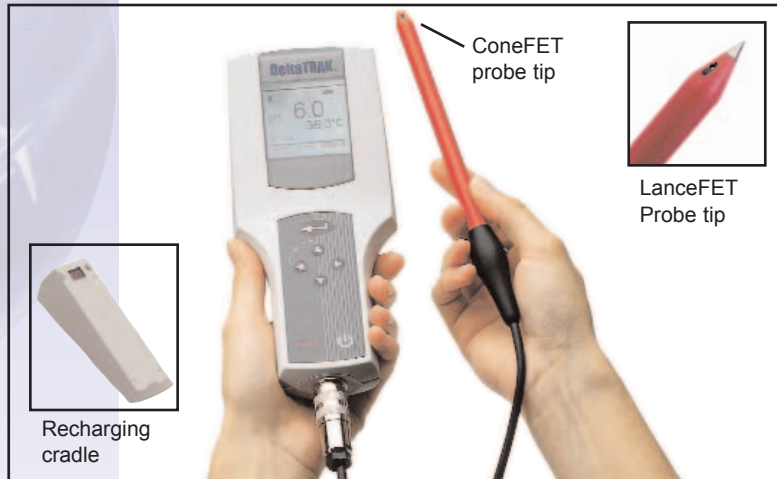

Model 24200

Model 24201

-  Rugged and portable
-  Automatic stability
-  Robust IP65 enclosure
-  Multi-Functional LCD
-  Easy Calibration
-  Self-diagnostics and help functions

Measuring Range	pH	0.00 to 14.00
	Temp	0°C to 60°C or -5°C to 105°C, probe dependent
Resolution	pH	0.1 or 0.01 pH-unit, user selectable
	Temp	0.1°C
Accuracy	pH	±0.01 + least significant digit (LSD) using 2 or more point calibration; ±0.1 using 1 point calibration
	Temp	±0.5°C
Operating Environment	0°C to 40°C (32°F to 104°F); 85% RH max	
Storage Environment	-5°C to 70°C (23°F to 158°F); 95% RH max	
Data Logging	24200	None
	24201	Up to 300 measurements of pH, temperature, date and time Programmable start, interval and duration times. Data can be recalled on display and uploaded to a computer.
Battery	NiMH rechargeable battery 40 hours when fully charged; warning at 5 hours remaining life.	
Display	Graphics LCD	
Calibration	1 or 2-point calibration with automatic buffer recognition.	
Size	215 x 95 x 60 mm (8.5 x 3.7 x 2.4 in.)	
Buffer Tables	Sets of DIN, NIST and JIS buffers, a set of 5 DeltaTRAK supplied, NIST traceable buffers.	
Weight	325 grams (12 oz.)	