

## Overview

Walchem's WEL Series electrodes are cost-effective differential pH and ORP electrodes for industrial applications. They are modular in design with a rugged CPVC housing which contains the electronics; pH and ORP cartridges can easily be connected or replaced in minutes without tools.

The cartridges feature a unique threaded interlock connection and a double o-ring seal, ensuring a watertight fit and secure seating at all times.

The optional differential preamplifier and temperature compensation element are in the housing, and are not thrown away when the electrode needs replacement. The electrode is powered by the controller it is connected to, so the signal is always preamplified and there are no batteries to go dead. A titanium solution ground rod integral to the housing enables the differential measuring technique. This results in prolonged electrode life and reliable measurement, resistance to stray voltages and currents or ground loop problems.

The electrode design enables a universal mounting style - a single housing and cartridge can be mounted in-line or submersed. This reduces inventory of parts and spares needed.



## WEL Series pH/ORP Electrodes

### Summary of Benefits

- Differential preamp
- Universal mounting
- Easily replaceable electrode cartridges
- Electronics are not discarded with the electrode
- Optional ATC
- Easy to install
- Cartridge Styles:
  - *Flat Surface*
  - *Bulb / Rod*
  - *HF Resistant*
- Resistant to electronic noise, ground loops
- CE Performance & Safety Certifications


**W A L C H E M**

# WEL Series


## pH/ORP Electrodes



### Installation with Preamplified Housing SUBMERSION

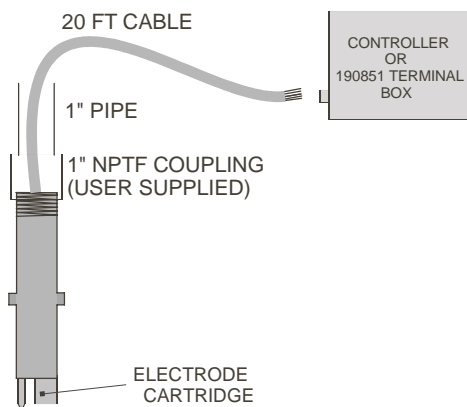

### Installation with Preamplified Housing IN-LINE

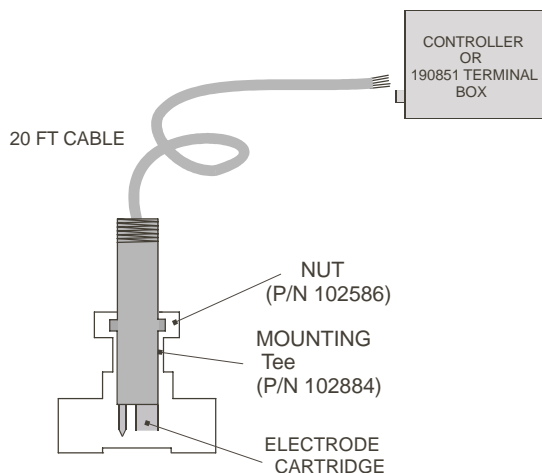

The differential preamplifier and optional automatic temperature compensation (ATC) element are built into the housing, resulting in signal amplification at the optimal location - right next to the sensor. Temperature response is *fast*, increasing accuracy of measurement.



The titanium ground rod makes the differential measurement technique possible and it is resistant to aggressive chemistries.

The differential technology provides a longer electrode life, a signal that is more immune to electronic noise, high voltage potential in solution and ground loops.




The preamp electronics are powered by the controller it is attached to: the signal is always preamplified, distance from the controller is not critical (less than 1000 ft. is recommended) and there is no concern about a battery going dead.

The electrodes are available with either tinned leads or BNC connector, for easy, flexible installation. The electrode cartridge can be replaced without also having to replace the preamp or ATC element. Different styles are available to best fit your need: flat surface design resists fouling; low cost bulb version for less demanding applications; a fluoride-resistant glass version for aggressive solutions.



The cartridge has a unique threaded interlock connection which seats the electrode securely in the housing. Knurled machining of the casing at the surface end provides for a sure grip when removing or inserting a cartridge. The design of the electrode enables the unit to be used in immersion or in-line applications, reducing required inventory.



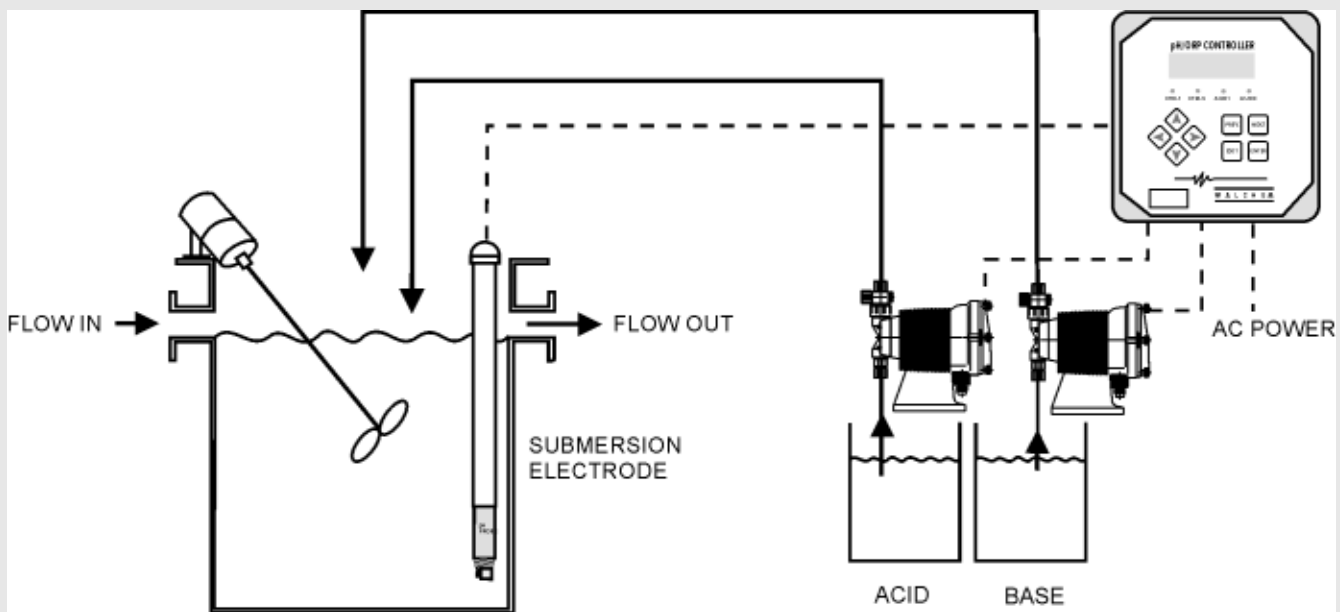

### pH/ORP Electrode

Range	0 to 14 pH (0 to 12 without sodium ion error) ± 1999 mV (ORP)	
Response	95% in less than 5 seconds	
Impedance	Cartridge Not to exceed 1000 M Ω over temperature range Housing 100 ohms, preamplified versions Not to exceed 1000 M Ω over temperature range, non-preamplified versions	
Temperature Range		
Housings with preamplifier	32 to 158°F (0 to 70°C)	
Housings without preamplifier	32 to 212°F (0 to 100°C)	
PHF, MVF, MVR & PHLI	50 to 212°F (10 to 100°C)	
PHB cartridges	32 to 212°F (0 to 100°C)	
PHH cartridges	32 to 122°F (0 to 50°C)	
Operating Pressure	100 PSIG	
Wetted Materials of Construction	Electrode body	CPVC
	Electrode reference	HDPE
	O-rings	FKM
	Electrode:	glass (pH) or platinum (ORP)

### Housing/Preamplifier

Power	± 5Vdc; 5 mA maximum	
Submersion Connection	1" NPTM	
In-Line Connection	3/4" NPTF threaded tee	
	In-line mounting nut	
	In-line mounting o-ring	
Wetted Materials of Construction	Housing body	CPVC
	Ground rod	Titanium
	In-line tee	GFRPP
	O-rings	FKM

### AGENCY CERTIFICATIONS

The WEL Series electrodes are in compliance with CE EMC standards.

WEL -  -    
 (Cartridge) (Housing) (Mounting Style)

## CARTRIDGE

- PHF = Flat surface pH
- PHB = Bulb pH
- PHH = HF resistant pH
- MVF = Flat surface ORP
- MVR = Rod style ORP
- PHLI = Flat pH, if sample <100  $\mu$ S/cm

## HOUSING

- 1 = Housing with preamplifier and PT1000 ATC, 20' cable with tinned leads
- 2 = Housing with preamplifier, 20' cable with tinned leads
- 3 = Housing with PT1000 ATC, 20' coaxial cable with BNC connector
- 4 = Housing, 20' coaxial cable with BNC connector
- 5 = Housing with preamplifier and PT100 ATC, 20' cable with tinned leads
- 6 = Housing with PT100 ATC, 20' coaxial cable with BNC connector

## MOUNTING STYLE

- 1 = Submersion mounting
- 2 = In-line mounting (3/4" NPTF tee)



WEBMASTER GENERAL INDUSTRIAL CONTROLLER



WEBMASTER COOLING TOWER AND BOILER CONTROLLER



METERING PUMPS AND ACCESSORIES



WEBALERT REMOTE MONITORING & DATALOGGING

Walchem designs and manufactures an integrated line of analytical control, sensing and feed devices.

Our in-house engineering is driven by quality, technology and innovation.

For more information on the entire Walchem product line,

儀高儀器有限公司

EASTCO LIMITED

Website : [www.eastco-hk.com](http://www.eastco-hk.com)



HONG KONG HEAD OFFICE  
 Flat 26, 2/F, Thriving Ind. Centre,  
 26-38 Sha Tsui Road, Tsuen Wan,  
 N.T., Hong Kong  
 Tel: (852)2456 1823  
 Fax: (852) 2469 1767  
 E-mail: [info@eastco-hk.com](mailto:info@eastco-hk.com)  
 網絡實名: 儀高南儀器

SHENZHEN OFFICE  
 EASTCO INSTRUMENT (SHENZHEN) CO., LTD  
 8/F, Bldg. 616, 1st Bagua Road,  
 Futian District, Shenzhen, P.R. China  
 Postal Code : 518029  
 Tel : (86-755) 8241 3890  
 Fax: (86-755) 8241 3857  
 E-mail: [shenzhen@eastco-hk.com](mailto:shenzhen@eastco-hk.com)

SHANGHAI OFFICE  
 Rm 1810, 18/F., 701 Hutai Road,  
 Shanghai, P.R. China  
 Postal Code : 200072  
 Tel : (86-21) 5653 6311  
 Fax: (86-21) 5653 6309  
 E-mail: [shanghai@eastco-hk.com](mailto:shanghai@eastco-hk.com)